Handheld-Zwirnmaschine halbautomatisch für Drahtenden WPM-NX3612AJ

Model No. WPM-NX3612AJ



SPECIFICATIONS

Betriebsspannung	220V
Leistung	500W
Gewicht	2.5kg
Verdrillgeschwindigkeit	1200 U/min
Drahtdurchmesser	0.5-6mm
Abmessungen	300x150x100mm

Handheld-Zwirnmaschine, halbautomatische Zwirnmaschine, manuelles Zwirnwerkzeug, elektrische Zwirnmaschine, mehrsträngige Zwirnmaschine

Technische Parameter**:**

Betriebsspannung	Netzteil	Größe **(mm)** •	Gewicht **(g)**	Kabellänge m)	Anschlusslänge Fußschalter **(m)**
Gleichstrom 24V	Leistungsaufnahme: AC100-240V /50/60Hz, Ausgang: DC24V	Länge:248.0 Maximaler Außendurchmesser:51,0	535.0	1.2+2.0 (Kabelleitung + Verlängerungsleitung)	2.0
In Draht mit Lochdurchmesser (mm)	Eigenschaften des verdrillten Drahtes	**Länge der Drahteinlage (mm)**	**Maximale** Querschnittsfläche des verdrillten Drahtes **(mm^2)**	Minimale Querschnittsfläche einer verdrillten Linie **(mm^2)**	Betriebsart
8/12	Auf flexibles Mehraderkabel auftragen	10-20	4.0	0.3	Handpresse/ Fußpresse

Handheld desktop dual-purpose electric twisting machine

Multi-strands are used in parallel / can be tightened in half a second / high efficiency



Continuous copper wire Tighten the wire	easy to use Twisting is not tired
efficient Twisting	No hidden danger Non-flying copper wire



Portable mobile twisting tool

Φ13mm large-diameter screw thread opening, adapt to the thickness of the wire diameter, the transparent cover can be removed to make the opening wider

Good twisting quality	Lightweight and compact	Flexible operation	Strong applicability

6 PRODUCT FEATURES

Say goodbye to the problems of hand-tightening, tired and slow screwing



01
Suitable for multi-strand parallel operation, twisted wires within 30mm in length

02
Desktop fixed use with foot switch operation is flexible, and the operation of the entrance port is more convenient

03
Hanging and handheld use does not occupy the position of the console

04
Simple assembly line operation

05
New grip artificial mechanics design

06
Replace manual threading to improve efficiency

Handheld desktop dual-purpose electric twisting machine

Twisted wire range: wire length within 30mm
Multi-strand cord ≤30mm²



1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords can be automatically tightened







Hanging hook
Pedal edge wiring
Body
Manual switch
power cable
transparent lid
Twisting port

Sample display

This machine supports 1 strand, 2 strands, 3 strands, 4 strands, 5 strands, and multiple strands of copper core cords to be twisted together







Product details





Manual switch

Touch the button switch, tighten the thread in half a second, it's so fast

Twisting clamp

You can put multiple copper core wires into the twisting clamp, touch the button switch to complete the twisting

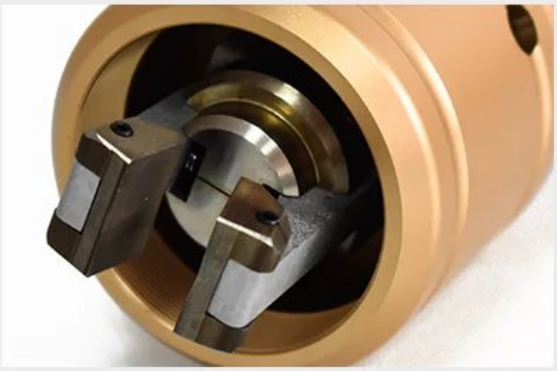

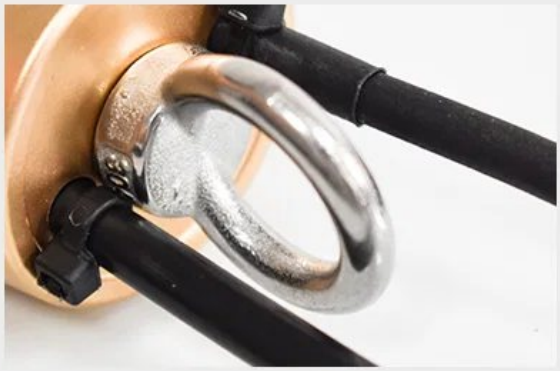

Hanging hook

Hanging and handheld use does not occupy the position of the console

Adjustable voltage

The voltage of the power adapter can be adjusted to a suitable value according to the wire specification, the smaller the wire diameter, and the larger the smaller diameter.





Desktop use

It can be fixed on the desktop, with a foot switch for flexible operation

transparent lid

The twisting machine port has a transparent cover that can be removed, and the transparent cover is larger.



Parts List



FAQ

Welchen Leistungseingang akzeptiert die halbautomatische Hand-Drahtverdrillmaschine WPM-NX3612AJ?

Der Leistungseingang ist AC100-240V bei 50/60Hz, mit einem Ausgang von DC24V. Der weite AC-Bereich bedeutet, dass die Maschine in Regionen mit unterschiedlichen Netzspannungen ohne separaten Transformator eingesetzt werden kann.

Wie lauten die physischen Abmessungen der Hand-Drahtverdrillmaschine WPM-NX3612AJ?

Die Maschine hat eine Länge von 248.0 und einen maximalen Außendurchmesser von 51.0. Ihr kompaktes Handformat ist für Verdrillarbeiten direkt am Kabelbaum gedacht, nicht an einer festen Werkbankstation.

Kann die halbautomatische Hand-Drahtverdrillmaschine WPM-NX3612AJ mit unterschiedlichen Netzspannungen betrieben werden?

Ja. Sie akzeptiert AC100-240V bei 50/60Hz und wandelt dies in einen DC24V-Ausgang um. Dieser universelle Eingangsbereich eignet sich für das halbautomatische Drahtverdrillen in Werkstätten mit niedriger oder hoher Netzspannung.